


DRIVE APPROACH WITH NON-CONTIGUOUS SIDEWALK

N.T.S.

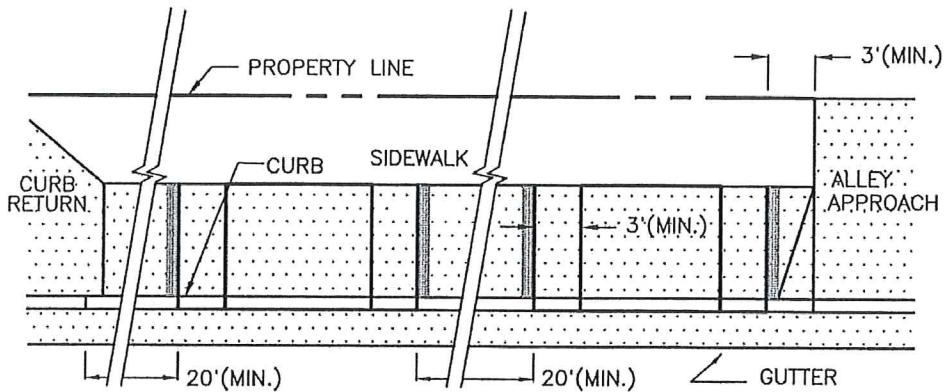

DRIVE APPROACH WITH CONTIGUOUS SIDEWALK

N.T.S.

NOTES:

1. 60% MAXIMUM OF CURB FACE MAY BE USED FOR DRIVE APPROACH THROAT WIDTH.
2. CONSTRUCTION OF DRIVE APPROACHES SHALL BE IN ACCORDANCE WITH STANDARD DRAWING NO. P-4.
3. COMMERCIAL DRIVE APPROACH SHALL BE 9 FEET MINIMUM AND 35 FEET MAXIMUM.
4. NO. 4 BARS @ 12" O.C. EACH WAY AND NO. 4 BARS TO EXTEND 12" BEYOND CONSTRUCTION JOINTS.
5. A 12" WIDE BORDER OF 1/4" X 1/4" WIDE GROOVES 3/4" APART SHALL BE LOCATED ON THE LEVEL SIDEWALK SURFACE AT THE TOP OF THE DRIVEWAY

**COMMERCIAL & INDUSTRIAL
DRIVE APPROACH
PLACEMENT**

Rev.

Date: 10/1/03
Harry A. Town
City Engineer

**STD.
NO.
P-6**